

## Universal hood type dishwasher - up to 75 racks, 1350 plates / 2700 glasses / hour



Accessories not included

### Technical Data

1. flexible drain hose 2000mm	20mm inner / 25mm outer diam.
2. fresh water connection: pressure hose 2000mm flow pressure	R 3/4" inside 0.5 - 10 bar 55-65°C <sup>2)</sup>
3. power cord	2500mm - no plug
4. hose for detergent 5. hose for rinse aid	2000mm in length each
cycle times <sup>1)</sup>	47 sec. 70 sec. 150 sec. Endless
water consumption	1.6 / 2.3 litres / rack
tank capacity	40 litres
tank heating	2.5kW
power supply	415/50/3NE
booster loading	12.3kW
total loading	17.1kW
pump capacity	2x1.1kW
bench to bench (internal dim)	628mm
loading height	440mm
noise level	68 dB(A)
weight net	appr.135kg



<sup>1)</sup> To reach the set rinse temperature even with cold water connection, the actual cycles times extend accordingly

<sup>2)</sup> Cold water connection for AUP-R

Water hardness should not exceed 3°dH, if higher we recommend using a water softener.

If mineral content is high a demineraliser may be advisable.

- **VAPO RINSE ECO:** switchable steam rinse reduces fresh **water consumption to 1.6 litre**. Saving 30% water and detergent as well as up to 40% rinse aid (compared with standard 2.3litre rinse) **NEW**
- **HOT-TEMP WASH** - increased wash temperature of 63°C increases capacity to 75 racks / hour
- **"Connect & use"** - includes drain pump, fill & drain hoses, 3 phase power lead, non-return valve & chemical dispensers
- Specialised **CUTLERY WASH CYCLE** **NEW**
- **GeniusX<sup>2</sup> advanced filter system** with pre-wash function, reduces detergent consumption by up to 30%
- **Hood concept E-STORE** fully enclosed, 4 sided **INSULATED** hood - avoiding loss of heat (up to 50%), energy saving (up to 3kW/hr) & minimizing work environment noise & heat
- **ROTOR-X** 4 spoke wash arms for maximum wash results
- Selectable **wash program POWER PLUS** for heavily soiled items - 2nd wash pump is activated
- **EASY-LIFT hood** - up to 50% less operator effort required
- **SMARTRONIC** single button control with colour coded status and cycle indication - ergonomically positioned
- Optimum hygiene - deep drawn tank with coved corners (no welds) and **SELF-CLEANING CYCLE**
- **Hygiene program ACTIVE** and **hygiene tab INTENSIVE:** removes calcium carbonate and other deposits from tank wall
- **Patented wide angle FAN wash nozzles** - precise & efficient for even wash water distribution
- Deep clean **STARCH REMOVAL** wash program
- Optional **heat recovery E-SAVE** waste water heat recovery system via integral heat exchanger saves up to 6.5kW - Model AUP-R

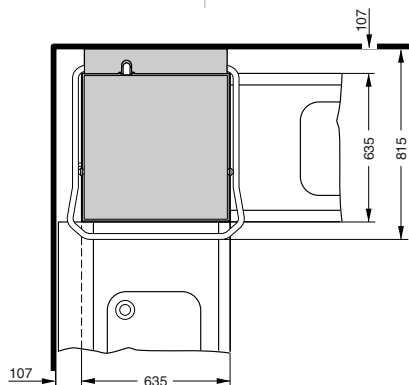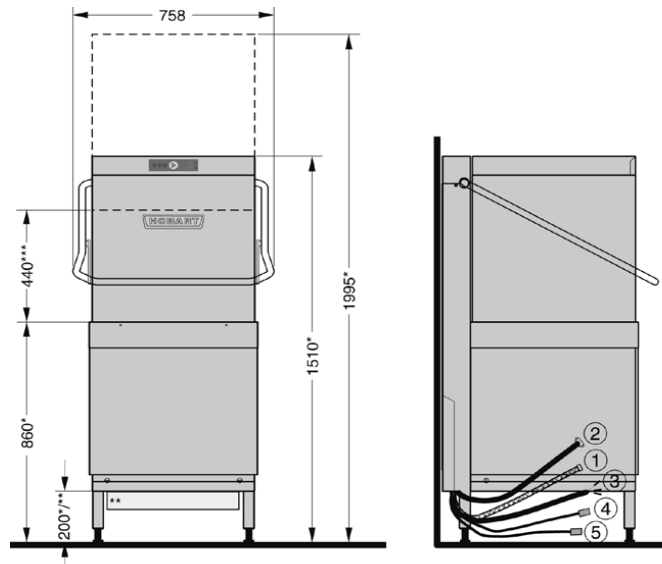

\* = +/- 25mm adjustable feet

\*\* = 110mm for AUP-R