

## ALTO SHAAM 1000-BQ2/96

### HOT HOLDING BANQUET CARTS

Stainless steel exterior with dutch doors and transport handles. Cabinet is controlled with an ON/OFF power switch, adjustable electronic thermostat which includes a heat indicator light and temperature set knob. 4 x chrome plated wire shelves included.

A full-perimeter, wall-friendly bumper is included, along with casters.

Banquet cart will hold covered meals without plate carriers. Additional shelves equip cart to hold pre-plated meals without covers, trays, and bulk food items in pans.



### STANDARD FEATURES

- HALO HEAT a controlled, uniform heat source that gently surrounds food for better appearance, taste, and longer holding life.
- Close temperature tolerance and even heat application provides even heat from top to bottom – side to side.
- Holds preplated food fresh, flavorful, and hot.
- No moisture pans, water or canned heat needed.
- Designed to adapt to any type of banquet holding:
  - Covered plates, stacked
  - Covered or uncovered plate carriers
  - Accepts trays for banquet service
  - Additional shelves for full-size and half-size pans (gastronorm pans)
- Dutch doors designed to keep heat in the top portion of the cabinet while removing plates from the bottom.
- Non-magnetic stainless steel interior resists corrosion.
- Full perimeter, wall-friendly bumper, transport handles, and heavy duty casters.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

*From the world of Comcater!*


**National Head Office**  
156 Swann Drive  
Derrimut VIC 3030  
Tel: +61 3 8369 4600  
Fax: +61 3 8369 4695

**Melbourne**  
96-100 Tope Street,  
South Melbourne VIC 3205  
Tel: +61 3 8369 4600  
Fax: +61 2 8699 1299

**Sydney**  
20/4 Avenue of the Americas  
Newington, NSW 2127  
Tel: +61 2 9748 3000  
Fax: +61 2 9 648 4762

**Brisbane**  
1/62 Borthwick Avenue  
Murarrie QLD 4172  
Tel: +61 7 3399 3122  
Fax: +61 7 3399 5311

# ALTO SHAAM 1000-BQ2/96

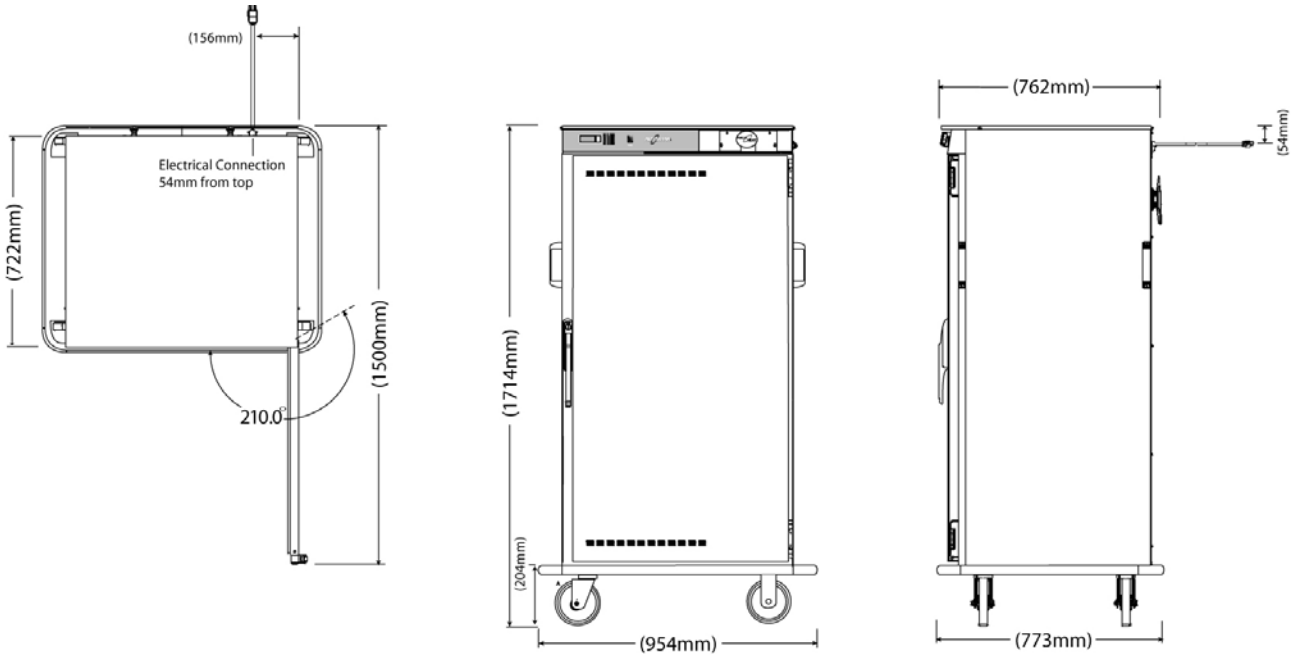

## DIMENSIONS

External Dimension: 1714H x 954W x 773D mm

Interior Dimension: 1346H x 718W x 648D mm

## TECHNICAL DATA

Power Supply	10 amp single phase. 240 Volts
Voltage	240
Phase	1
Hertz	50/60
Amps	6.5
kW	1.5

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



www.comcater.com.au

PROUDLY DISTRIBUTED BY: