

ALTO SHAAM 1000-S

LOW TEMPERATURE HOT HOLDING CABINETS

Single compartment holding cabinet with 20 gauge stainless steel exterior and door. The cabinet includes one (1) ON/OFF power switch, one (1) adjustable temperature knob with a temperature range of 16° to 93°C; one (1) indicator light; and one (1) digital display. Included are two (2) chrome plated side racks (230V models use stainless steel) with eleven (11) pan positions spaced at 35mm centers, three (3) chrome shelves, and one (1) set of 89mm heavy duty casters – 2 rigid and 2 swivel with brake.



STANDARD FEATURES

- HALO HEAT...a controlled, uniform heat source that gently surrounds food for better appearance, taste, and longer holding life.
- Holds hot food hot...meat, poultry, fish, potatoes, casseroles, vegetables, rolls, etc.
- Close temperature tolerance and even heat application maintain ideal serving temperatures throughout the cabinet.
- Stainless steel interior resists corrosion.
- Available in reach-in or pass-through design.
- Casters provide easy mobility.
- Can be stacked with an identical unit or cook/hold oven to save space.
- Antimicrobial handle retards the growth of illness-causing pathogens.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

From the world of Comcater!



National Head Office
156 Swann Drive
Derrimut VIC 3030
Tel: +61 3 8369 4600
Fax: +61 3 8369 4695

Melbourne
96-100 Tope Street,
South Melbourne VIC 3205
Tel: +61 3 8369 4600
Fax: +61 2 8699 1299

Sydney
20/4 Avenue of the Americas
Newington, NSW 2127
Tel: +61 2 9748 3000
Fax: +61 2 9 648 4762

Brisbane
1/62 Borthwick Avenue
Murarrie QLD 4172
Tel: +61 7 3399 3122
Fax: +61 7 3399 5311

ALTO SHAAM 1000-S

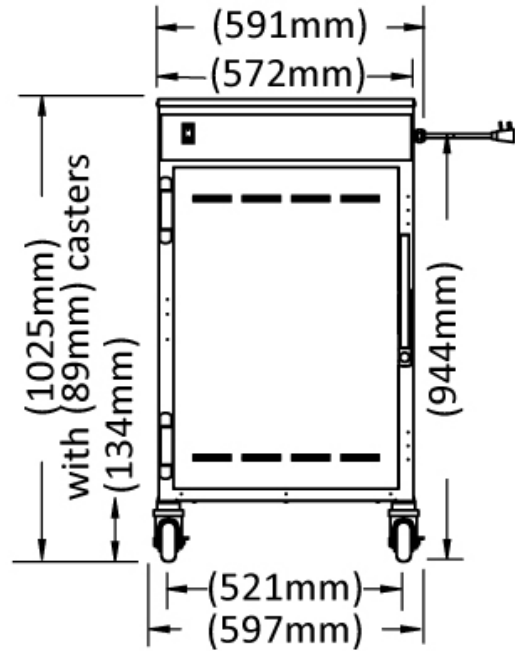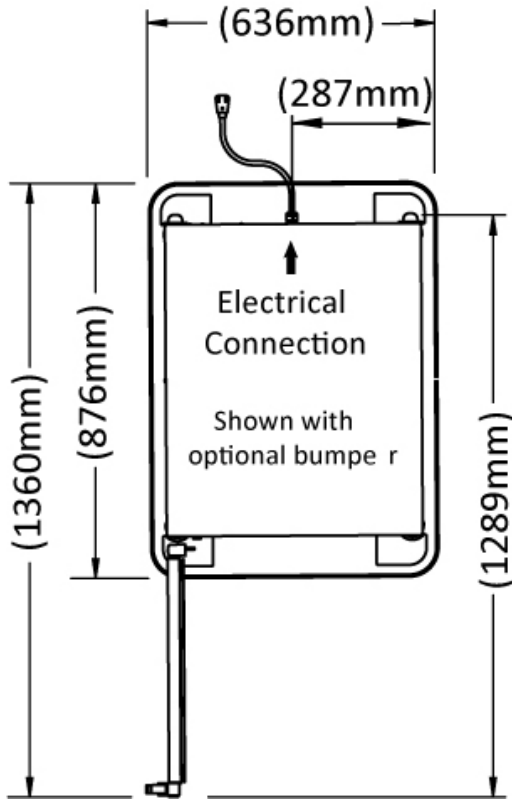

DIMENSIONS

External Dimension: 1012H x 573W x 788D mm

Internal Dimensions: 682Hx 479W x 673D mm

TECHNICAL DATA

Power Supply	10 amp single phase. 240 Volts
Voltage	240
Phase	1
Hertz	50
Amps	4.3
kW	0.9

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



www.comcater.com.au

PROUDLY DISTRIBUTED BY: