

CLEVELAND KEL SERIES

ELECTRIC FLOOR MOUNTED KETTLES

Electric self contained stationary kettle, 2/3 jacketed. Solid state controls for accurate temperature control ($\pm 1^\circ\text{C}$) and low water safety. Supplied with 50mm tangent draw-off valve with drain strainer, spring assisted cover and faucet bracket. All exterior surfaces are stainless steel.

Model: [KEL-25 \(100lt capacity\)](#)
[KEL-30 \(110lt capacity\)](#)
[KEL-40 \(150lt capacity\)](#)
[KEL-60 \(225lt capacity\)](#)
[KEL-80 \(300lt capacity\)](#)
[KEL-100 \(375lt capacity\)](#)



STANDARD FEATURES

- Self-contained, easily installed
- 50 psi safety valve
- Faucet mounting bracket
- Water resistant controls, splash-proof construction
- 51mm diameter tangent draw-off valve with drain strainer
- Steam jacket filled with treated water, venting and/or refilling is not required
- Re-inforced rolled rim design prevents damage to kettle rim, eliminates "bar rim designs"
- Easily cleaned: kettle and all exterior surfaces are of type 304 stainless steel with an #4 finish
- 50 psi steam jacket rating for higher cooking temperatures
- 1 5/8" O.D. tri-leg supports with level adjustable feet for floor bolting
- Spring-assisted, hinged, rotatable, domed stainless steel cover
- Rear mounted easy access pressure gauge and pressure relief valve to prevent tampering. Color coded easy to read pressure gauge with "green" and "vent air zone"
- Accurate, consistent solid state temperature controls (mechanical thermostat not as accurate) - less than $\pm 1^\circ\text{C}$ variance (ideal for simmering). Operating temperature range from 63°C - 127°C Control panel includes: LED indicator for heat cycle, LED indicator for low water, Power ON/OFF switch, Adjustable temperature control dial

OPTIONAL FEATURES

- Cooking Baskets and Tri-Basket Supports (BS and TBS)
- Clean-up Brush (CB)
- 914mm Kettle Whip (KW)
- Draw-off Brush (DB)
- Automatic Water Meter (GMF or LMF)
- Lift-off Covers (CL)
- Measuring Strip (MS)
- Swing Funnels for drain (SF)
- Heat Deflector Shield (HS001)
- Hot and Cold Water Faucet with Swing Spout (DPK)
- Type 316 Stainless Steel Kettle Liner for high acid food products (316)
- Kettle Accessory Kit (KAK) includes:
- 914mm Kettle Paddle (KP)
- 914mm Kettle Brush (KB)
- 24 oz. Ladle (KL)
- Water Meter Stand (SWM)
- Drain Strainers (DS-)
- Kettle Markings (KM)
- Alternate Mounting Systems
- 76mm diameter Tangent Draw-Off Valve w/Strainer (TD3)
- Correctional Packages

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

From the world of Comcater!


National Head Office
156 Swann Drive
Derrimut VIC 3030
Tel: +61 3 8369 4600
Fax: +61 3 8369 4695

Melbourne
96-100 Tope Street,
South Melbourne VIC 3205
Tel: +61 3 8369 4600
Fax: +61 2 8699 1299

Sydney
20/4 Avenue of the Americas
Newington, NSW 2127
Tel: +61 2 9748 3000
Fax: +61 2 9 648 4762

Brisbane
1/62 Borthwick Avenue
Murarrie QLD 4172
Tel: +61 7 3399 3122
Fax: +61 7 3399 5311

CLEVELAND KEL SERIES

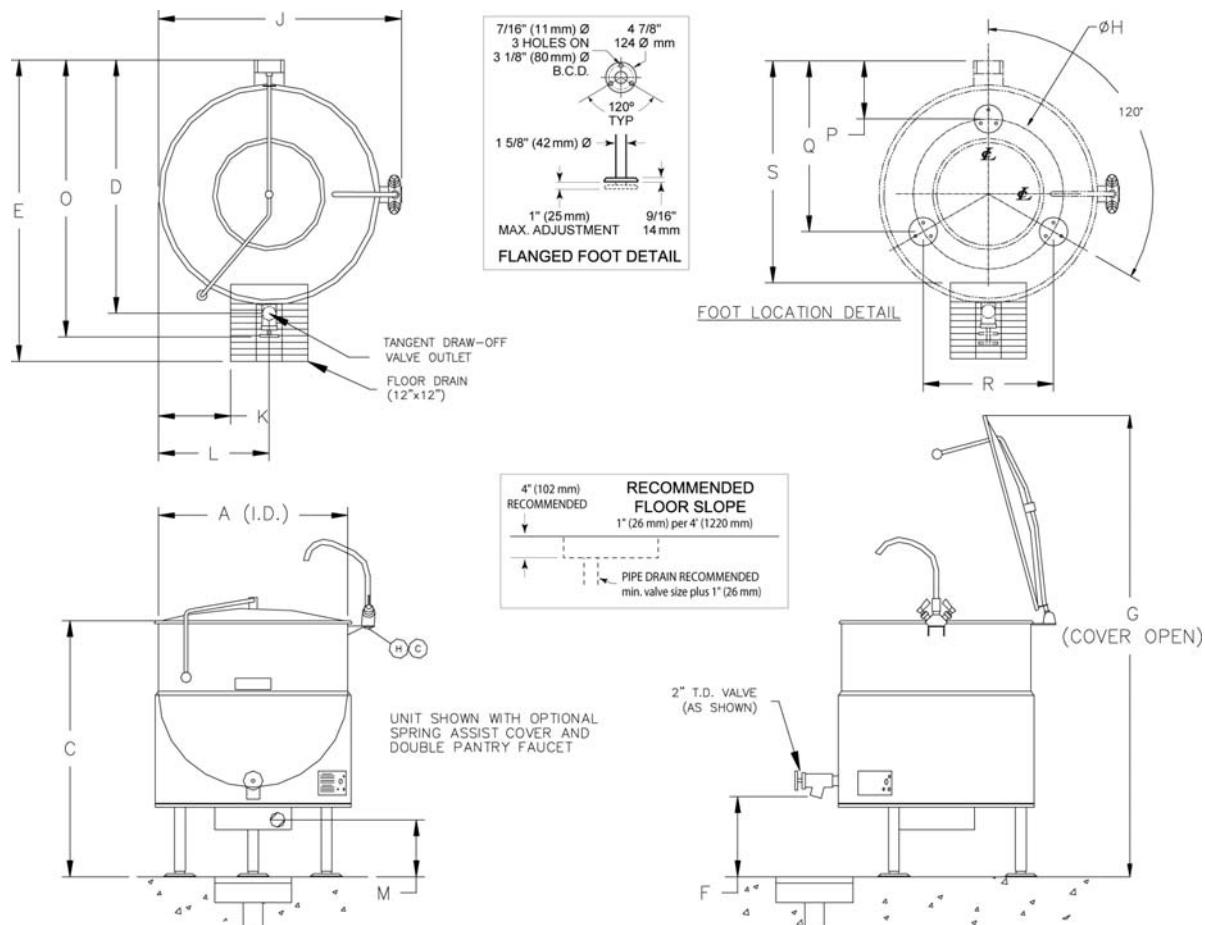

DIMENSIONS (mm)

LITRES	A	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	R	S
100	534	934	556	864	353	1544	455	759	134	286	248	191	680	118	508	394	569
110	610	966	632	940	397	1658	531	731	172	324	299	293	756	118	515	461	645
150	661	1016	740	1016	385	1766	582	782	197	350	280	223	864	118	553	505	728
225	750	1093	839	1118	372	1925	670	870	242	394	267	210	963	131	699	582	826
300	839	1105	931	1194	331	2020	759	959	286	439	229	172	1055	131	747	658	912
375	902	1144	997	1270	318	2118	823	1023	318	470	216	159	1121	131	131	712	975

TECHNICAL DATA

Power Supply 415V, 3 Phase, 16.7 amp (KEL-25)
 415V, 3 Phase, 20.9 amp (KEL-30)
 415V, 3 Phase, 25.1 amp (KEL-40)
 415V, 3 Phase, 25.1 amp (KEL-60)
 415V, 3 Phase, 25.1 amp (KEL-80)
 415V, 3 Phase, 25.1 amp (KEL-100)

Energy Rating 13kW (KEL-25)
 16.4kW (KEL-30)
 19.6kW (KEL-40)
 19.6kW (KEL-60)
 19.6kW (KEL-80)
 24.8kW (KEL-100)

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



www.comcater.com.au

Proudly distributed by: