

## CLEVELAND KGL SERIES

### GAS FIRED STATIONARY STEAM KETTLES

Gas heated self contained stationary kettle with solid state controls for accurate temperature control ( $\pm 1^{\circ}\text{C}$ ) and low water safety. Supplied with 50mm tangent draw-off valve and drain strainer, spring assisted cover and faucet bracket. All exterior surfaces are stainless steel

Model: **KGL-25 (100lt capacity)**  
**KGL-40 (150lt capacity)**  
**KGL-60 (225lt capacity)**  
**KGL-80 (300lt capacity)**  
**KGL-100 (375lt capacity)**



#### STANDARD FEATURES

- Automatic Electronic Spark Ignition System.
- Supplied with Gas Pressure Regulator.
- "Splash-Proof" rear-mounted pressure/vacuum gauge.
- Spring Assist Cover and 2" tangent draw-off are standard.
- Support Legs with level adjustable feet, flanged for floor bolting.
- Self-contained gas stationary kettle is easily installed, only needs a gas connection and a 240 volt outlet.
- Kettle and all exterior surfaces are a 304 Stainless Steel with a #4 finish.
- Energy efficient (65%), high performance gas-fired heating system for fast heat-up and recovery time:
- Heavy-duty Rolled Rim design provides strong reinforcement, prevents damages from abuse.
- Steam jacket permanently filled with treated distilled water; venting and/or refilling is not required.
- 50 psi Steam Jacket Rating. Safety Valve mounted toward rear of kettle to avoid tampering.
- Precise, consistent temperature control, less than  $1^{\circ}\text{C}$  temperature variance (ideal for simmering). Operating temperature range from  $63^{\circ}\text{C}$ - $127^{\circ}\text{C}$ .
- "Splash-Proof" Solid-State Control Panel for temperature, Low Water Safety, and Power "On/Off" Switch. Accurate L.E.D. Indicators for Heat Cycle and Low Water Warning.

#### OPTIONAL FEATURES

- 316 Stainless Steel Liner (316)
- Kettle Markings (KM)
- Basket Strainer (BS and TBS)
- Food Strainer (FS)
- Kettle Accessory Kit (KAK) includes:
  - 914mm Kettle Paddle (KP)
  - 914mm Kettle Brush
  - 24 oz. Ladle (KL)
- Propane Gas Option (LP)
- Lift Off Cover (CL)
- Measuring Strip (MS)
- Hot and cold water faucet (DPK), or cold water (SPK).
- Clean-up Brush (CB)
- 914mm Kettle Whip (KW)
- Draw-Off Brush (DB)
- Correctional Packages

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

*From the world of Comcater!*


**National Head Office**  
 156 Swann Drive  
 Derrimut VIC 3030  
 Tel: +61 3 8369 4600  
 Fax: +61 3 8369 4695

**Melbourne**  
 96-100 Tope Street,  
 South Melbourne VIC 3205  
 Tel: +61 3 8369 4600  
 Fax: +61 2 8699 1299

**Sydney**  
 20/4 Avenue of the Americas  
 Newington, NSW 2127  
 Tel: +61 2 9748 3000  
 Fax: +61 2 9 648 4762

**Brisbane**  
 1/62 Borthwick Avenue  
 Murarrie QLD 4172  
 Tel: +61 7 3399 3122  
 Fax: +61 7 3399 5311

# CLEVELAND KGL SERIES

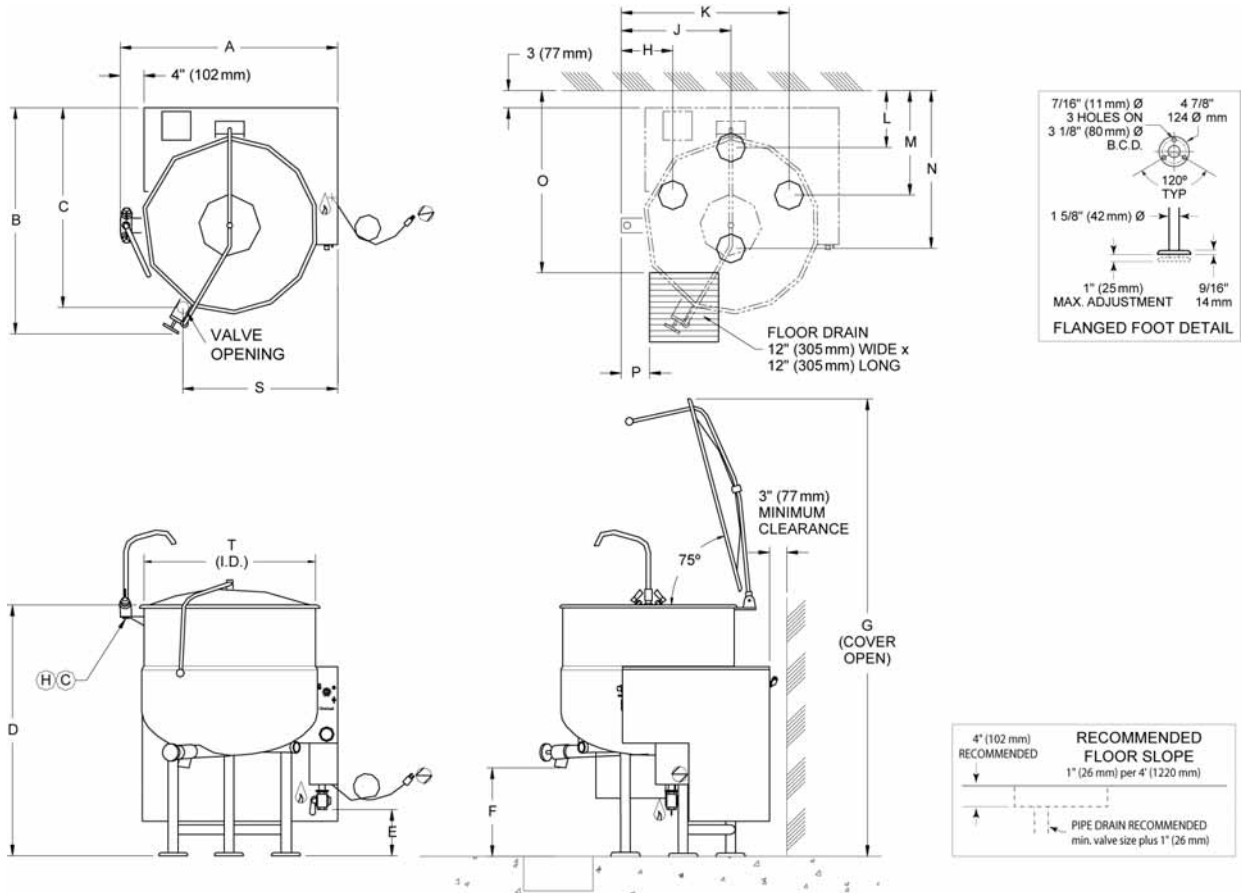

UNIT SHOWN WITH OPTIONAL 2" TANGENT DRAW-OFF VALVE, SPRING ASSIST COVER AND HOT & COLD WATER FAUCET.

## DIMENSIONS (mm)

LITRES	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	S	T.I.D
100	686	978	-	981	-	406	1575	-	-	-	127	330	-	737	57	-	533
150	893	940	820	1029	235	407	1817	243	451	659	264	474	683	724	118	648	661
225	972	991	870	1105	223	362	1905	228	486	745	264	474	709	769	134	686	750
300	1058	1077	902	1156	223	394	2007	235	528	820	264	474	753	801	169	737	839
375	1118	1105	928	1207	223	394	2121	232	556	880	264	474	794	826	191	775	902

## TECHNICAL DATA

Gas Type	Natural or LP	Power Supply	240V, 1 Phase, 50Hz 5amp
Energy Rating	95mj (KGL-25) 148mj (KGL-40) 200mj (KGL-60) 200mj (KGL-80) 200mj (KGL-100)	Operating Pressure	50 psi
		Gas Connection	3/4"

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



www.comcater.com.au

PROUDLY DISTRIBUTED BY: