



Electrolux

air-o-steam class B Electric Combi Oven 201

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux



air-o-steam

class B Electric Combi Oven 201

268204 (AOS201EBA2) EI Combi Oven 201 – 400V/3ph/60Hz

268224 (AOS201EBN2) EI Combi Oven 201 – 230V/3ph/60Hz

Short Form Specification

Item No.

Convection-steamer with dedicated steam generator guarantees a continuous supply of fresh steam at all times.

air-o-flow: fresh air is blown into the oven from the outside, after it is pre-heated it is pulled through the bi-functional fan, guaranteeing cooking evenness.

Humidity controlled through By-pass technology that guarantees the efficient use of the steam generator thus reducing water and energy consumption. Manual injection of water to add additional moisture in the cell.

air-o-clean: built-in cleaning system with four automatic pre-set cycles and one semi-automatic cleaning cycle.

Cooking cycles: steam (100 °C), low temperature steam (25-99 °C), overheated steam (101-130°C), hot air (25-300 °C), combi (25-250 °C), regeneration. 2-step cooking with the possibility to combine different cycles. Half power, half speed and pulse ventilation controls. Food probe for precise cooking. Double-glass door with book-like opening maintains a cool external temperature and incorporates a drip pan to collect excess condensation avoiding wet floors. Halogen lighting in the cooking chamber. Side panels and interior in AISI 304 stainless steel.

Supplied with n.1 trolley rack 1/1GN, 63mm pitch and door shield.

Main Features

- Low temperature Steam cycle 25 °C to 99.4 °C: ideal for sous-vide (vacuum packed) re-thermalization and delicate cooking.
- Steam cycle 100 °C: seafood and vegetables.
- High temperature steam 100.5 °C - 130 °C.
- Combination cycle 25 °C to 250 °C: combining convected heat and steam to obtain humidity controlled cooking environment, accelerating the cooking process and reducing weight loss.
- Hold function: provides an impulse ventilation ideal for holding and light pastry.
- Variable fan speed. Radial fan.
- Reduced power cycle.
- air-o-clean™ automatic and built-in self cleaning system (4 automatic and 1 semi-automatic cycles).
- Simple sensor core temperature probe included.

Construction

- IPX 5 spray water protection certification for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Seamless hygienic cooking chamber with all rounded corners for easy cleaning.
- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Swing hinged front panel for easy service access to main components.

Optional Accessories

- Trolley with tray rack for 20x1/1GN ovens and bcf, 63mm pitch (std) PNC 922007
- Trolley with tray rack for 16x1/1GN ovens and bcf, 80mm pitch PNC 922010
- Trolley with rack for 54 plates for 20x1/1GN ovens and bcf, 74mm pitch PNC 922016
- Couple of grids for whole chicken 1/1GN (8PNC 922036 per grid)
- Pastry trolley, for 16 and 20x1/1GN ovens and bcf, 80mm pitch (16 runners). Suitable for 600x400mm pastry trays in oven PNC 922068
- Non-stick universal pan 1/1GN H=20mm PNC 922090
- Non-stick universal pan 1/1GN H=40mm PNC 922091
- Non-stick universal pan 1/1GN H=60mm PNC 922092
- Baking tray with 4 rows (baguette), perforated aluminium with silicon coating (325x530x38) PNC 922192
- Baking tray with 4 edges, perforated aluminium (325x530x20) PNC 922193
- Baking tray with 4 edges, aluminium (325x530x20) PNC 922194
- Frying griddle GN 1/1 PNC 922215


APPROVAL: _____




Electrolux

air-o-steam class B Electric Combi Oven 201

Front

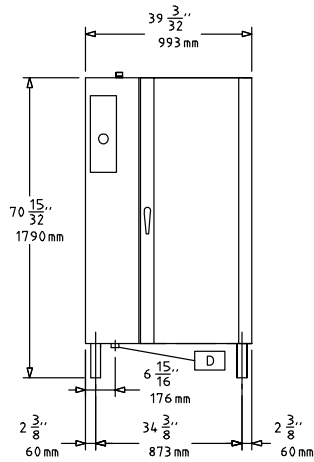


Top

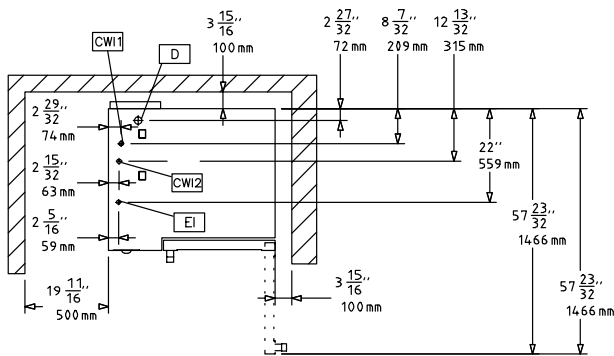

CWI = Cold Water inlet EI = Electrical connection
 D = Drain
 DO = Overflow drain pipe

Side

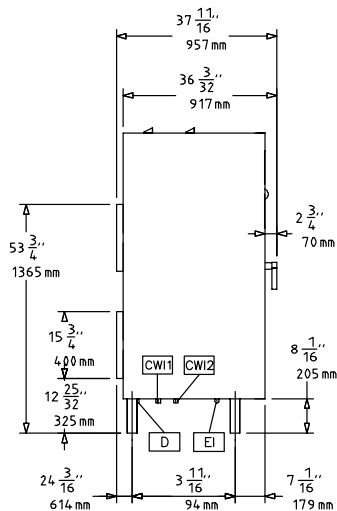

Electric

Supply voltage:

268204(AOS201EBA2)	400 V/3N ph/50/60 Hz
268224(AOS201EBN2)	230 V/3 ph/50/60 Hz

Connected load:

34.5 kW

Circuit breaker required

Water:

Water inlet "CW" connection: 3/4"

Water inlet "FCW" connection: 3/4"

Total hardness: 5-50 ppm

Pressure: 1.5-4.5 bar

Drain "D": 1"1/4

Electrolux recommends the use of treated water, based on testing of specific water conditions.

Please refer to user manual for detailed water quality information.

Installation:

Clearance: 5 cm rear and right hand sides.

Suggested clearance for service access: 50 cm left hand side.

Capacity:

GN: 20 - 1/1 Gastronorm

Max load capacity: 100 kg

Key Information:

Net weight: 284 kg

Shipping weight:

268204(AOS201EBA2) 315 kg

268224(AOS201EBN2) 309 kg

Shipping height: 1795 mm

Shipping width: 993 mm

Shipping depth: 957 mm

Shipping volume: 1.71 m³



air-o-steam
class B Electric Combi Oven 201

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Included Accessories

- 1 of Trolley with tray rack for 20x1/1GN ovens and bcf, 63mm pitch (std) PNC 922007
- 1 of Door shield for pre-heating oven, without trolley, 20 GN 1/1 PNC 922094
- 1 of Control panel filter for 20xGN1/1 ovens PNC 922248

Optional Accessories

- Automatic water softener for ovens PNC 921305
- Resin sanitizer for water softener PNC 921306
- Trolley with tray rack for 20x1/1GN ovens and bcf, 63mm pitch (std) PNC 922007
- Trolley with tray rack for 16x1/1GN ovens and bcf, 80mm pitch PNC 922010
- Thermal blanket for 20x1/1GN PNC 922014
- Trolley with rack for 54 plates for 20x1/1GN ovens and bcf, 74mm pitch PNC 922016
- Pair of 1/1 GN AISI 304 grids PNC 922017
- Couple of grids for whole chicken 1/1GN (8 per grid) PNC 922036
- Pastry trolley, for 16 and 20x1/1GN ovens and bcf, 80mm pitch (16 runners). Suitable for 600x400mm pastry trays in oven PNC 922068
- Rack for 45 plates for 20x1/1GN, 90mm pitch PNC 922072
- Grid for whole chicken 1/2GN (4 per grid - 1,2kg each) PNC 922086
- Non-stick universal pan 1/1GN H=20mm PNC 922090
- Non-stick universal pan 1/1GN H=40mm PNC 922091
- Non-stick universal pan 1/1GN H=60mm PNC 922092
- Aluminium oven grill 1/1GN PNC 922093
- Door shield for pre-heating oven, without trolley, 20 GN 1/1 PNC 922094
- Water filter for ovens 20x2/1GN, 1,8 lt/min PNC 922104
- Kit HACCP EKIS PNC 922166
- Side external spray unit PNC 922171
- 2 fat filters for 20 1/1 and 2/1 GN combi steamers (gas and electric) and convection ovens (electric) PNC 922179
- Baking tray with 5 rows (baguette), perforated aluminium with silicon coating (400x600x38) PNC 922189
- Baking tray with 4 edges, perforated aluminium (400x600x20) PNC 922190
- Baking tray with 4 edges, aluminium (400x600x20) PNC 922191
- Baking tray with 4 rows (baguette), perforated aluminium with silicon coating (325x530x38) PNC 922192
- Baking tray with 4 edges, perforated aluminium (325x530x20) PNC 922193
- Baking tray with 4 edges, aluminium (325x530x20) PNC 922194
- Frying griddle GN 1/1 PNC 922215
- 2 frying baskets for ovens PNC 922239
- Heat shield for 20x1/1GN PNC 922243
- Retractable spray unit for 20GN1/1&2/1 ovens PNC 922263
- Grid for whole chicken 1/1GN (8 per grid - 1,2kg each) PNC 922266
- Kit integrated HACCP for ovens PNC 922275
- Adjustable wheels for 20GN 1/1 and 2/1 lengthwise ovens PNC 922280
- Frying griddle GN 2/3 for ovens PNC 922284
- Non-stick universal pan GN 2/3 H=20mm PNC 922285
- Baking tray for baguette 1/1GN PNC 922288

