

LINCOLN 1100 SERIES IMPINGER II

SINGLE BELT CONVEYORISED OVEN

Impinger II 1100 series is a self-contained conveyorised gas or electric Impinger oven that is stackable up to three high and designed for small to medium outputs requiring high output with minimal labour.

Comes with an exclusive lift off door for removing the conveyor and air distribution fingers from the front of the unit for easy cleaning in tight spaces.

The digital control panel makes it simple to adjust speed and temperature.

Oven is reversible via a switch at the rear of the oven.

Standard with FastBake™ technology which can reduce bake time by as much as 30% without increased noise levels or loss of product quality.



STANDARD FEATURES

- FastBake™ technology
- Stackable up to three oven cavities high
- 18" (457mm) wide, 56" (1422mm) long conveyor belt with product stop
- 28" (711mm) baking chamber
- Temperature adjustable from 121°C to 302°C
- Conveyor speed is adjustable from one minute to thirty minutes cooking time
- Front-loading access door with cool handle
- Direct conveyor drive is powered by an AC motor
- Stainless Steel top, front and sides
- Oven start-up/check-out by service agent included in price

OPTIONAL FEATURES

- Split belt

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

from the world of Comcater!

National Head Office
156 Swann Drive
Derrimut VIC 3030
Tel: +61 3 8369 4600
Fax: +61 3 8369 4695

Melbourne
96-100 Tope Street
South Melbourne VIC 3205
Tel: +61 3 8369 4600
Fax: +61 3 8699 1299


Sydney
20/4 Avenue of the Americas
Newington, NSW 2127
Tel: +61 2 9748 3000
Fax: +61 2 9648 4762

Brisbane
1/62 Borthwick Avenue
Murarrie QLD 4172
Tel: +61 7 3399 3122
Fax: +61 7 3399 5311

Perth
Unit 4/35 Westchester Road
Malaga WA 6090
Tel: +61 8 9248 9290
Fax: +61 8 9248 1903

COMCATER
-foodservice equipment-

1100 SERIES IMPINGER II

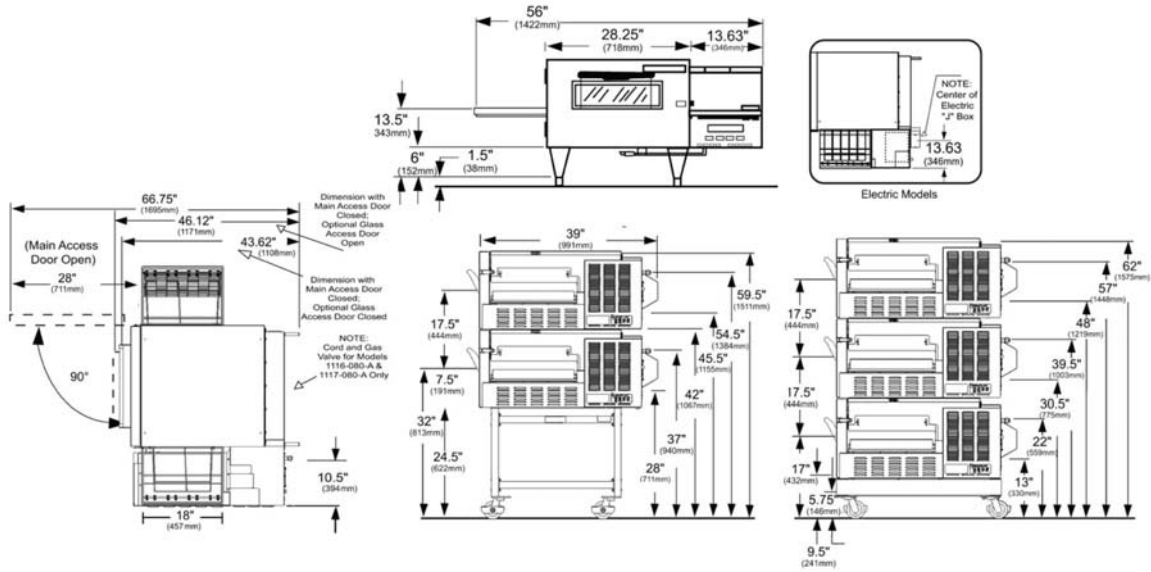

DIMENSIONS

- 1422W x 991D x 1067H mm (single deck)
- 1422W x 991D x 1511H mm (double deck)
- 1422W x 991D x 1575H mm (triple deck)

PRODUCTION

- Single deck 27 x 12" pizzas/hr at 6mins
- Double deck 54 x 12" pizzas/hr at 6mins
- Triple deck 81 x 12" pizzas/hr at 6mins

ACCESSORIES

- Stand with castors

TECHNICAL DATA

Model 1154 Natural Gas

- Power Supply 230V 1 Phase 50Hz 2amp
- Power Output 42.2mj per deck

Model 1155 LP Gas

- Power Supply 230V 1 Phase 50Hz 2amp
- Power Output 42.2mj per deck

Model 1164 Electric

- Power Supply 400Y/230V 3 Phase 50Hz 15amp
- Power Output 10kW per deck

CLEARANCE ALL MODELS

- Rear: 152mm
- Right side: 610mm

ORDERING GUIDE

1100 Single Unit

Model Numbers	Qty	Description
1154-S00-B-KF006		Natural Gas
1155-S00-B-KF006	1	LP Gas
1164-S00-E-KF006		Electric
1120-1	1	High Stand With Casters
1140	1	Take Off Shelf

1100 Double Stack

Model Numbers	Qty	Description
1154-S00-B-KF006		Natural Gas
1155-S00-B-KF006	2	LP Gas
1164-S00-E-KF006		Electric
1120-1	1	High Stand With Casters
1140	2	Take Off Shelf

1100 Triple Stack

Model Numbers	Qty	Description
1154-S00-B-KF006		Natural Gas
1155-S00-B-KF006	3	LP Gas
1164-S00-E-KF006		Electric
1124-1	1	Low Stand With Casters
1140	3	Take Off Shelf

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

PROUDLY DISTRIBUTED BY:



www.comcater.com.au