


CUSTOMER: SERIAL No: ORDER No:

All dimensions in mm

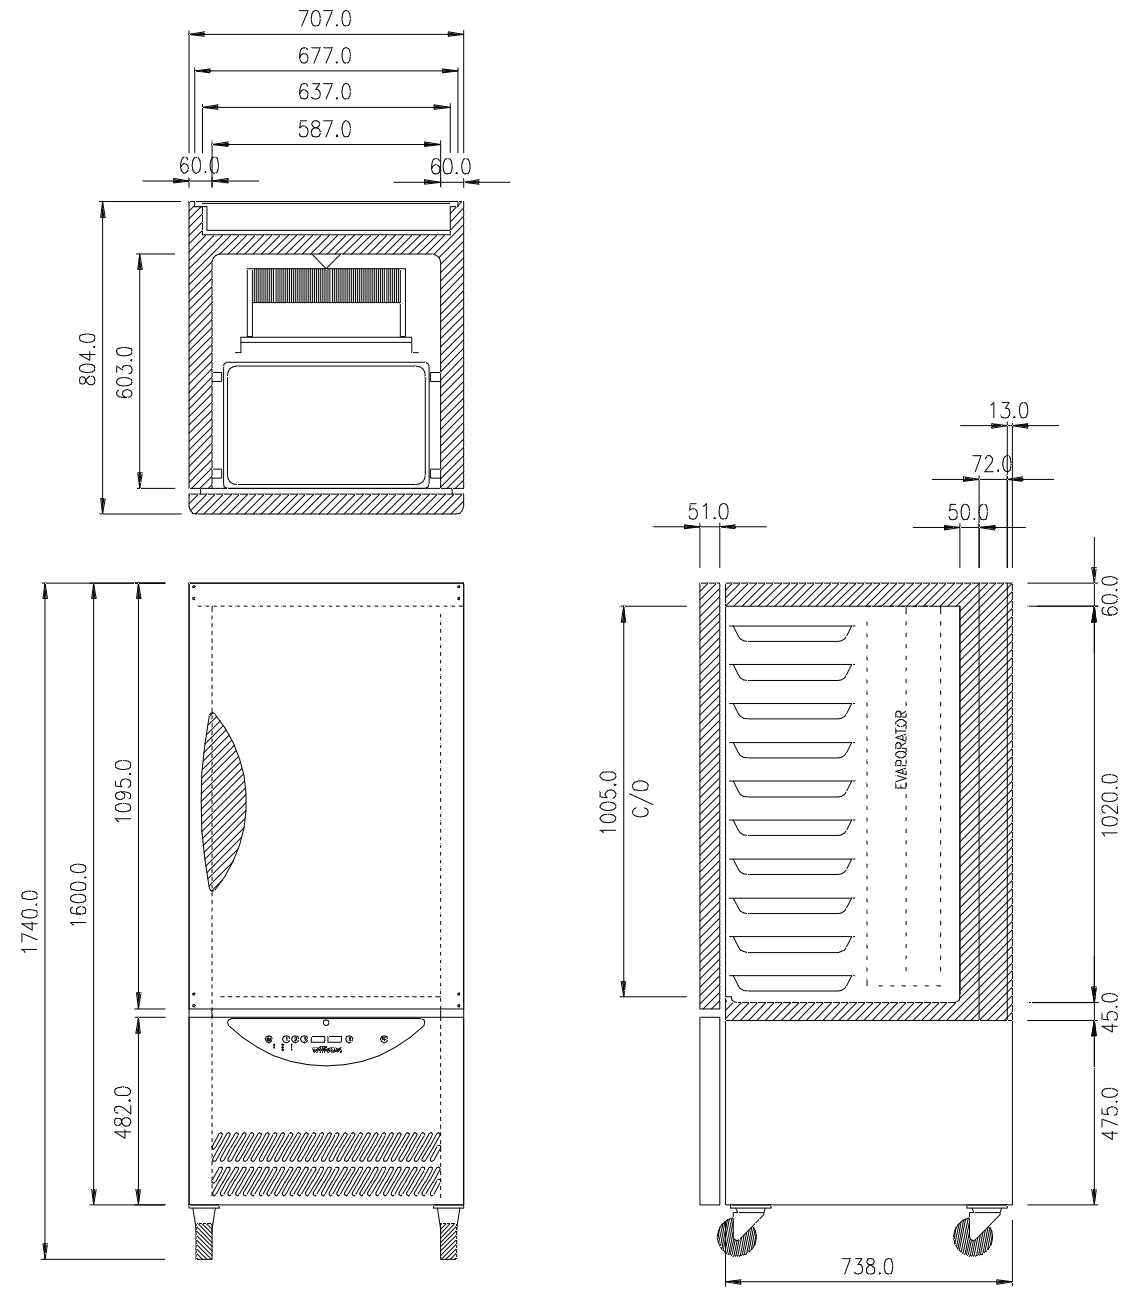

UPRIGHT BLAST CHILLER/FREEZER:
 2x EVAPORATOR FAN

CONTROLS:
 WEB CONTROL PANEL (1 FOOD PROBE)

ELECTRICAL SUPPLY:
 220-240V / 50Hz / 1Ph (16 amps)

MAINS LEAD:
 3m OF 2.5mm² 3-CORE (NO PLUG)

FINISH:
 430 DP1 EXT (GALV REAR)
 304 2B INT

CAPACITY:
 30 kg CHILL / 90 mins
 30 kg FREEZE / 240 mins

TO ACCEPT 10 OFF -
 1/1 GASTRONORM PANS

REMOVED ENGLISH
 OVERLAY TEXT

Modifications:
 Issue number: 003
 Modified by: C.J. Date: 09/02/05
 Approved by: C.J. Date: 09/02/05

SUPPLU CHANGED TO 16amp
 & TEXT ALTERED

Modifications:
 Issue number: 002
 Modified by: J HILL Date: 17/12/03
 Approved by: SR Date: 17/12/03

Williams Refrigeration (DM)
 Bennett Street,
 Downham Market, Norfolk,
 PE38 9EE.

This drawing and all copies produced are the property of Williams Refrigeration and must not be copied or distributed by any third party without obtaining authorisation.

DRAWING TITLE:
 WBCF30 RIGHT HAND HUNG
 UPRIGHT BLAST CHILLER/FREEZER CABINET c/w CASTORS

DRAWN BY:
 J HILL

CHECKED BY:

DATE:
 14/10/03

DATE:

SCALE:
 1:20

ISSUE:
 003

DRAWING NUMBER:
 E./Spec-Drg/WBCF/WBCF30 R-HH