

## Ruby Upright Cabinet

# Ruby

General Uprights

### Features:


- Designed for 43°C ambient environment
- Adjustable electronic controller with digital temperature display
- High efficiency, long life LED strip lighting (lights are optional on solid door models)
- 100% CFC free polyurethane foam for greater insulation properties and added strength
- Top mounted self contained cabinet
- Auto defrost
- Waste heat recovery vaporiser
- Four adjustable plastic coated shelves – shelves are one piece
- Self closing doors with easy to clean handles
- Hermetique compressor



Model	R2	R3
Capacity	750 litres	1160 litres
<b>Finish: White Colorbond® interior and exterior with stainless steel internal floor*</b>		
Refrigerator Glass Door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	<b>HR2GDCB</b> 200/4.6/760	<b>HR3GDCB</b> 250/5.5/1000
Refrigerator Solid Door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	<b>HR2SDCB</b> 200/4.6/530	<b>HR3SDCB</b> 250/5.4/660
Freezer Solid Door 18°/-22° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	<b>LR2SDCB</b> 200/3.6/710	<b>LR3SDCB</b> 250/5.3/960
<b>Finish: Stainless Steel interior and exterior*</b>		
Refrigerator Glass Door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	<b>HR2GDSS</b> 200/4.6/760	<b>HR3GDSS</b> 250/5.5/1000
Refrigerator Solid Door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	<b>HR2SDSS</b> 200/4.6/530	<b>HR3SDSS</b> 250/5.4/660
Freezer Solid Door -18°/-22° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	<b>LR2SDSS</b> 200/3.6/710	<b>LR3SDSS</b> 250/5.3/960

\*Refer notes page 15

Options (see page 15):

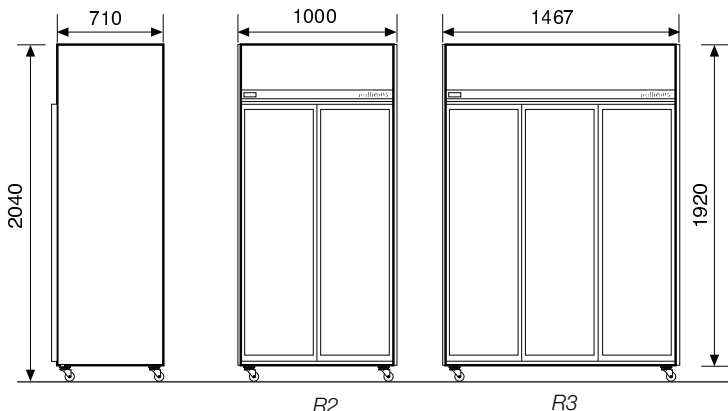

Gas: Self-contained fridge R134a@-5C SST  
Self-contained freezer R404a@-30C SST  
Remote units R404a (others available)  
Electrical lead length 1.5m min. 240V 50Hz  
Heat rejection self-contained units:  
Fridge 1.4xWr, Freezer 1.6xWr