

Self Contained Ice Machine up to 85 Kg



Features

- Produces individual Gourmet crystal clear supercubes
- Up to 85 kg (184 lbs) daily production
- Up to 48 kg (106 lbs) ice storage capacity
- Resistant stainless steel exterior
- Advanced diagnostics Computerized control
- Front panel in&out airflow (air-cooled model only) for built-in installation
- Front access condenser air filter, removable and washable (air cooled version only)
- Easily accessible front panel mount ON-OFF Switch
- Routine Maintenance visible alarm light on front panel
- Ergonomically designed ice storage access, with disappearing door
- Door-closing movement dampening system
- Vapor-based microbial control system pouch in ice-storage area
- Water system protected by patented anti-scale system
- Optional PWD System for remote water drain (easy-fit installation)
- AgION antimicrobial agent embedded in moulded plastics parts
- CFC-free R-404a Refrigerant
- 2 years manufacturer warranty

Spray bar quick disconnect



Routine Maintenance Alarm



Front ON-OFF Switch



Storage bin antibacterial pouch & holder

Noiseless bin door



Patented anti-Scale system

Proximity condenser air filter



Available as optional KITLGSEXTO00

Easy bin access



Hygienic scoop holder

AC 176 Technologies



Model	Compressor	10°: 10°C			21°: 15°C			Dimensions (mm)
		[kg]	[lbs]	N°*	[kg]	[lbs]	N°*	
AC 176 AS		83	184	4175	78	172	3900	680x600x1000/1120
AC 176 WS		85	184	4250	78	172	3900	680x600x1000/1120

* Estimate number of small, medium or large size gourmet cubes. Standard legs 120 mm high included. **Optional: PWD System.**

This product qualifies for the following listings:



2 Years Warranty

Subject to certain limitations and exclusions

Medium Gourmet
20 g



34,5 mm x 30,5 mm x 29,5 mm
1 6/16" x 1 3/16" x 1 3/16"


www.scotsman-ice.it
www.scotsman-ice.com

Certified ISO 9001:2000

Models and specifications are subject to change without notice.

Other models in this range:
ACM 25 - AC 46 - AC 56 - AC 86
AC 106 - AC 126 - AC 206 - AC 226

Self Contained Ice Machine up to 85 Kg

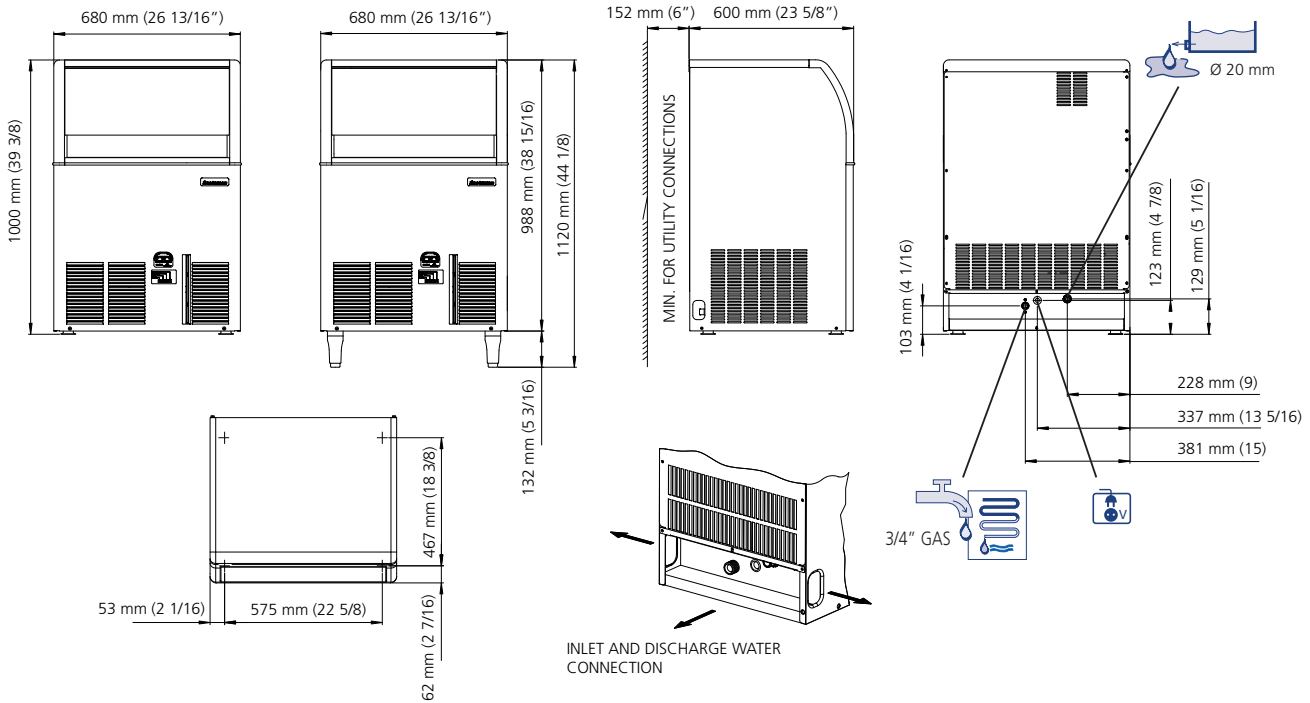

AC 176 AIR COOLED

°C \ °F	50° 10°	60° 15°	70° 21°	90° 32°	
10°	83.5	81	78.5	73.5	kg
50°	184	179	173	162	lbs
21°	80.5	78	75.5	73.5	kg
70°	177.5	172	166	155	lbs
32°	74	71.5	69	64	kg
90°	163	158	152	141	lbs
38°	68.5	66	63.5	58.5	kg
100	151	145.5	140	129	lbs



AC 176 WATER COOLED

°C \ °F	50° 10°	60° 15°	70° 21°	90° 32°	
10°	85	83	81	77	kg
50°	187	183	179	170	lbs
21°	80	78	76	72	kg
70°	176	172	167.5	159	lbs
32°	72	70	68	64	kg
90°	159	154	150	141	lbs
38°	70	68	66	62	kg
100	154	150	145.5	137	lbs



Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

Model	Cooling Type	Capacity [Btu/h]	Capacity [W]	Area [Ømm²]	Power [W]	FUSE	Energy [kWh] - 100 Kg	Water [l/h]	Water [gal/h]	Weight [kg] [lbs]	Weight [kg] [lbs]
AC 176 AS	Air Cooled	7850	2300	3x1.5	700	10	24.4	6.2	1.6	70 154	80 176
AC 176 WS	Water Cooled	7850	2300	3x1.5	700	10	22.5	15.3	19.3	70 154	80 176

CONTACT POINTS:

Europe
Scotsman Europe-Frimont S.p.A.
Via Puccini, 22
20010 Pogliano (Milano) Italy
Ph: (+39) 02-93960208
Fax: (+39) 02-93960201
scotsman.europe@frimont.it

Asia and Pacific
Scotsman Ice Systems-Frimont S.p.A. (R.O.)
627A Aljunied Road #04-04 Biztech Centre
Singapore 389842
Ph: (+65) 6738 5393
Fax: (+65) 6738 1959
scotsice@singnet.com.sg

China
Scotsman Ice Systems (Shanghai)
Room 2503, Building 2
20 Xuhong Middle Road, Xuhui District
Shanghai China 200235
Main line: (+86) 21 61313200
Fax: (+86) 21 61313330
scotsman.shanghai@scotsman-china.com

Middle East & N. Africa
Scotsman Ice Systems Dubai Office
P.o. Box 21648
Sharjah - U.A.E.
Ph: (+97) 16-5773-164
Fax: (+97) 16-5773-165
scotsman@eim.ae

South Africa
Scotsman Ice Systems SA (PTY) Ltd.
10, Rhodes Street - Kensington B
P.o. Box 44 - Riverdub 2149
Ph: (+27) 11-7898400
Fax: (+27) 11-7898411
scotsman@telkomsa.net

Spain
Scotsman España, S.L.U. c/ Galapagar, 12
Poligono Industrial Ventorro del Cano
28925 Alcorcon (Madrid)
Ph: +34-91-1109796
Fax: +34-91-6337423
E-mail: scotsman@scotsman-espana.es
www.scotsman-espana.es