

BREMA CB416A

SELF-CONTAINED ICE CUBE MACHINE

Brema's flagship CB range offers self-contained ice machines for bench top, under bench or free-standing installation. These machines produce attractive, crystalline cubes weighing 13g which rapidly chill and enhance the appearance of any beverage.

The Brema CB416A is an under bench ice cube machine that produces 42kg of ice per 24 hours and has storage capacity of 16kg.

The CB range of self-contained ice cube machines is the perfect fit for cafes, restaurants, hotels, bars and nightclubs.



STANDARD FEATURES

- 42kg production per 24 hours
- 16kg storage capacity
- Produces crystalline 13g cubes
- Production rated at 21°C air and 15°C water
- Hospital grade stainless steel outer
- Fully insulated internal storage bin
- Disappearing door
- Electromechanical operation
- Stainless steel spray arm

13g Cubes



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

From the world of Comcater!


National Head Office
156 Swann Drive
Derrimut VIC 3030
Tel: +61 3 8369 4600
Fax: +61 3 8369 4695

Melbourne
96-100 Tope Street,
South Melbourne VIC 3205
Tel: +61 3 8369 4600
Fax: +61 2 8699 1299

Sydney
20/4 Avenue of the Americas
Newington, NSW 2127
Tel: +61 2 9748 3000
Fax: +61 2 9 648 4762

Brisbane
1/62 Borthwick Avenue
Murarrie QLD 4172
Tel: +61 7 3399 3122
Fax: +61 7 3399 5311

BREMA CB416A

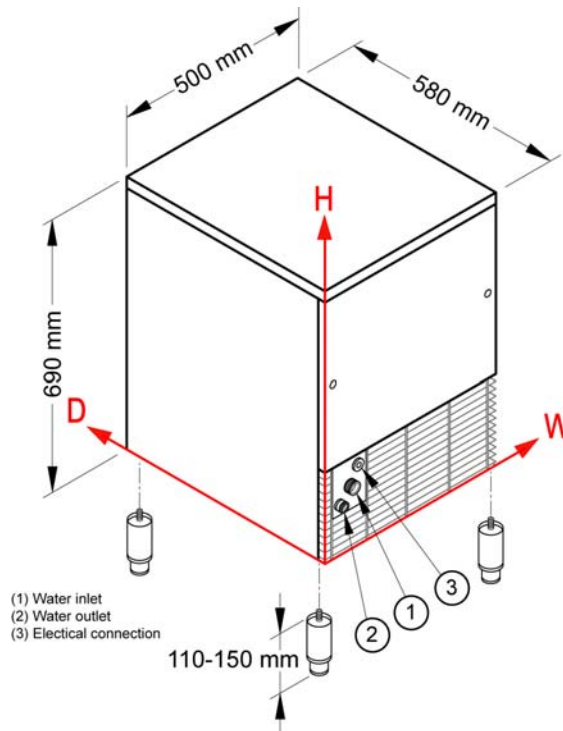

DIMENSIONS

500W x 580D x 690*H mm
(*add 110-150mm for adjustable legs)

CONNECTIONS

Water inlet, Water outlet & Electrical connection

TECHNICAL DATA

| | |
|------------------------|------------|
| Production 24h | 42 kg |
| Storage Capacity | 16 kg |
| Cooling System | Air |
| Cube | 13 g |
| Refrigerant | R404A |
| Electrical Consumption | 450W |
| Power Requirements | 240V 10amp |
| Weight | 52 kg |

STANDARD ACCESSORIES

- Water inlet hose
- Drainage hose
- External water filter
- Pressure limiting valve
- Plastic ice scoop
- Adjustable stainless steel legs (4)

CONNECTIONS

| | W | H |
|-----------------------|-----------------|------------------|
| Water inlet | 111 mm | 196 mm |
| Water outlet | 49 mm | 151 mm |
| Electrical connection | 156 mm | 232 mm |
| Clearances | Rear: 100 mm | Sides: 100 mm |

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



www.comcater.com.au

PROUDLY DISTRIBUTED BY: